

C-Lube Linear Roller Way Super MX

MX MASTER GRADE

Introducing the low fluctuation specification product, for superb high-precision feed!

The C-Lube Linear Roller Way Super MX low fluctuation specification MX Master Grade has special precision processing on the roller raceway surface, significantly reducing fluctuation compared to the standard extra long unit and thus making it the ideal product for ultra-precision working machine shaft guides, which require high-precision, high-quality machining.



Applicable products

Series	C-Lube Linear Roller Way Super MX
Supported models	MXL, MXDL, MXSL, MXNL, MXNSL
Size	30·35·45·55



MX Master Grade (low fluctuation specifications) is a special order product; if needed please contact **IKO**.

Features

1 Special raceway processing suppresses miniscule running deflection and significantly reduces pulsation compared to standard extra long units.

Fluctuation comparison data


Pulsation: Refers to the running deflection related to movement of the rolling elements within the Linear Roller Way.

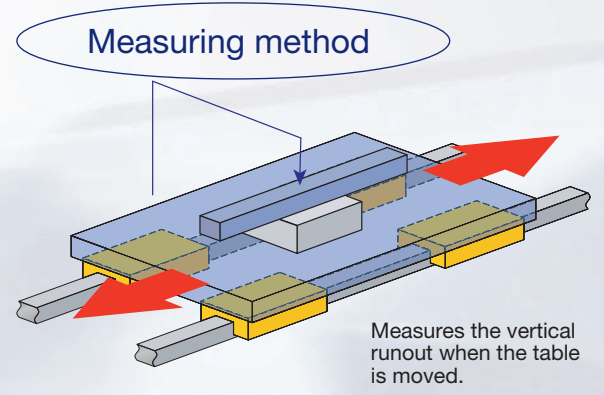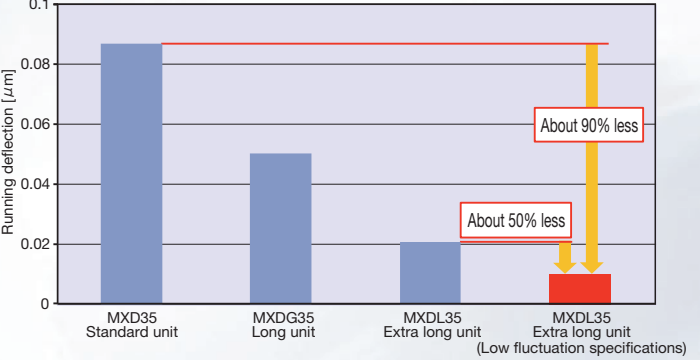

Super low fluctuation is achieved!
About 50% less fluctuation compared with the standard extra long unit!


2 Low fluctuation makes it ideal for ultra-precision working machine shaft guides, which require high-precision, high-quality machining.

Fluctuation data

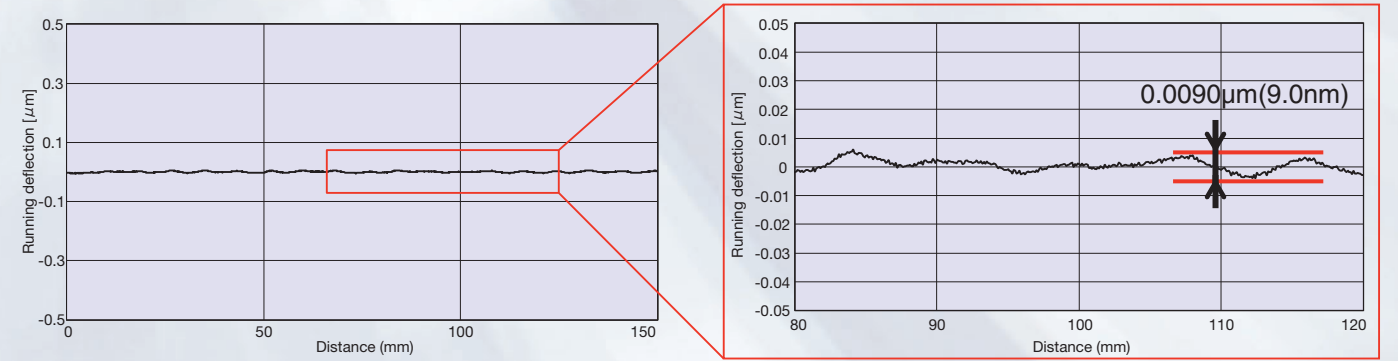

The **running deflection value** is within **0.0090μm(9.0nm)** in actual measurement!
Improve machining quality with the use of MX Master Grade!

3 The extra long unit contributes to improved load capacity and rigidity in mechanical equipment.



Standard

Long

Extra long


Elastic deformation relative to load is low in comparison with the standard and long types, device rigidity is improved, accuracy is improved, and resonance can be avoided.

IKO's unique ideas and experiences special environment applications.

IKO Linear Way and Linear Roller Way are available for various special environment by using different materials and grease, surface treatment and dust protection measures, etc. Typical application fields and major countermeasures are described below.

Clean Environment

When the Linear Way or Linear Roller Way is used in clean environment such as a clean room, it is required that the environment is not polluted by dust-generation by the Linear Way or Linear Roller Way and it must have excellent rust prevention property as rust prevention oil cannot be used.



Vacuum Environment

When the Linear Way or Linear Roller Way is used in vacuum environment, it is required that the gas discharged from the Linear Way or Linear Roller Way does not pollute the environment or reduce the degree of vacuum, and it must have excellent rust prevention property as rust prevention oil cannot be used.




Heat Resistance Measures

When the Linear Way is used in an environment where temperature is higher than usual, heat resistance of synthetic resin components and metal parts will be an issue.




Dust Protection

If dust such as metal or wooden chips get into the way of the Linear Way or Linear Roller Way, reduction of life and accuracy may be caused. Therefore, measures to prevent foreign substances from entering into the way are necessary.



Spatter Protection

Spatter of welding, etc. is so hot that it adheres to components. Foreign substances adhering to the track rail firmly cannot be fully removed by normal dust protection measures, so measures to avoid adherence and enhanced foreign substances removal measures are necessary.



are utilized to explore new world for

Clean

- Stainless Linear Way and Linear Roller Way
- Black chrome surface treatment
- Specified grease (CG2 or CGL grease)
- ◇ Fluorine grease

Corrosion resistance

- Hybrid C-Lube Linear Way L
- Non-magnetic Hard Alloy Linear Way L
- Non-magnetic stainless Linear Roller Way Super X
- Stainless Linear Way and Linear Roller Way
- Black chrome surface treatment

Vacuum

- Vacuum Environment Linear Roller Way Super X
- No end seal
- Stainless steel end plate
- ◇ Fluorine grease

Heat resistance

- Stainless steel end plate
- Special environment seal
- ◇ High temperature grease

Foreign substances (wood chips and metal powder, etc.)

- Linear Way H Ultra seal specification
- Track rail mounting from bottom
- Double end seals
- Scrapers
- C-Wiper
- Caps for rail mounting holes
- Rail cover plate for track rail
- Rail cover sheet
- Female threads for bellows
- Specific bellows

Spatter

- Scrapers
- Caps for rail mounting holes (aluminum alloy)
- Rail cover sheet
- Fluorine black chrome surface treatment
- Stainless steel end plate


- Linear motion rolling guide series for special environment :
Collective name of linear motion rolling guide series models corresponding to special environment.
- Special specification for special environment :
Special specification corresponding to special environment by combination of linear motion rolling guide series.
- ◇ Lubricant :
Lubricant suitable for each special environment can be selected.

Vacuum Environment

Linear Roller Way Super X

When a linear motion rolling guide is used in vacuum environment, generation of outgas from resin parts such as end plates will be an issue if standard products are still used. In addition, the specification must be applicable to high temperature environment during baking. As roller type linear motion rolling guide has a precise roller circulation structure, it has not been compatible with stainless steel end plate widely used in ball type linear motion rolling guides for special environment applications.

The newly developed Vacuum Environment Linear Roller Way Super X is a roller type linear motion rolling guide realizing excellent outgas reduction property by combining corrosion-resistant stainless steel casing and resin parts such as super engineering plastic (PEEK resin) end plate to resolve these issues. Excellent properties of roller type such as high load capacity, high rigidity and smooth sliding characteristic with low frictional resistance can be ensured even under vacuum environment.

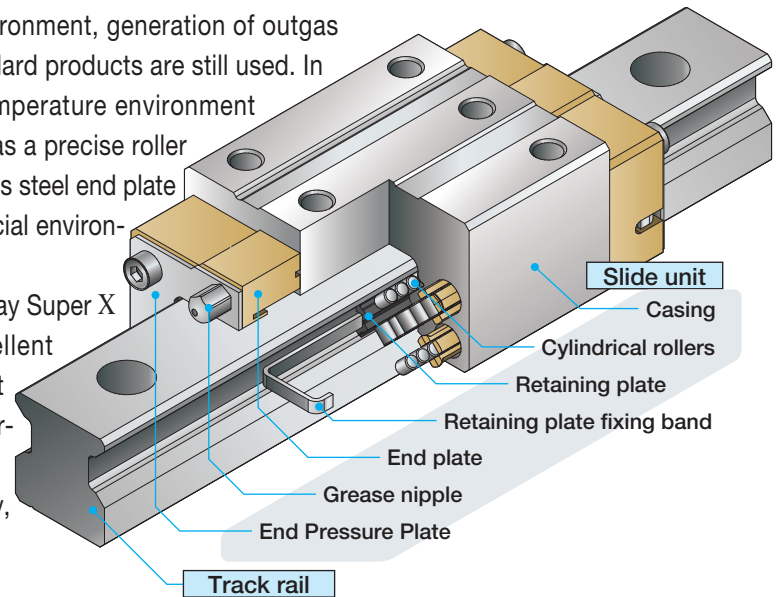


Features

Newly developed!
Roller type linear motion guide available under vacuum environment!

- 1** Corresponding to low to high vacuum area (degree of vacuum 10^{-3} [Pa])!
- 2** Excellent outgas reduction property!
- 3** Baking temperature can be up to 200°C!
 - Temperature in still condition.
 - If baking temperature exceeds 150°C, multiply the basic load rating by the temperature factor.
- 4** Excellent corrosion resistance!
 - Corrosion-resistant stainless steel is used in all steel made parts.

Selection of lubricant

Though fluorine grease is recommended for lubricant, carefully select grease since vapor pressure and temperature of base oil are correlated as vapor pressure goes up along with increase of the temperature. For details, see chosen grease manufacturer's catalog.

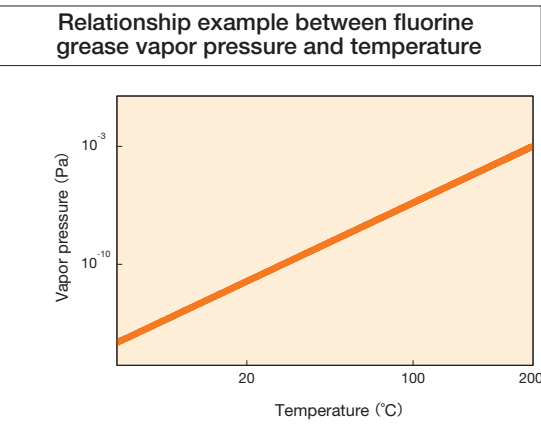

Representative brands of fluorine grease

Brand	Manufacturer
KRYTOX LVP	DU PONT
DEMNUM™ GREASE L-200	DAIKIN INDUSTRIES, LTD.
BARRIER TA SUPER IS/V	NOK KLUEBER
Klüberalfa GR Y-VAC3	NOK KLUEBER
FLUOTRIBO VAC	KYODO YUSHI CO., LTD.

Remarks 1. KRYTOX is a trademark of DU PONT.
2. DEMNUM™ is a trademark of DAIKIN INDUSTRIES.
3. FLUOTRIBO is a trademark of KYODO YUSHI.

Specifications


We can offer optimal specification for your use conditions. If needed, please contact IKO.

Applicable products

Series	Linear Roller Way Super X
Applicable model	LRXD20...SL

Main component materials


Casing	Martensitic stainless steel
Track rail	Martensitic stainless steel
Cylindrical rollers	Martensitic stainless steel
End plate	Super engineering plastic (PEEK resin)

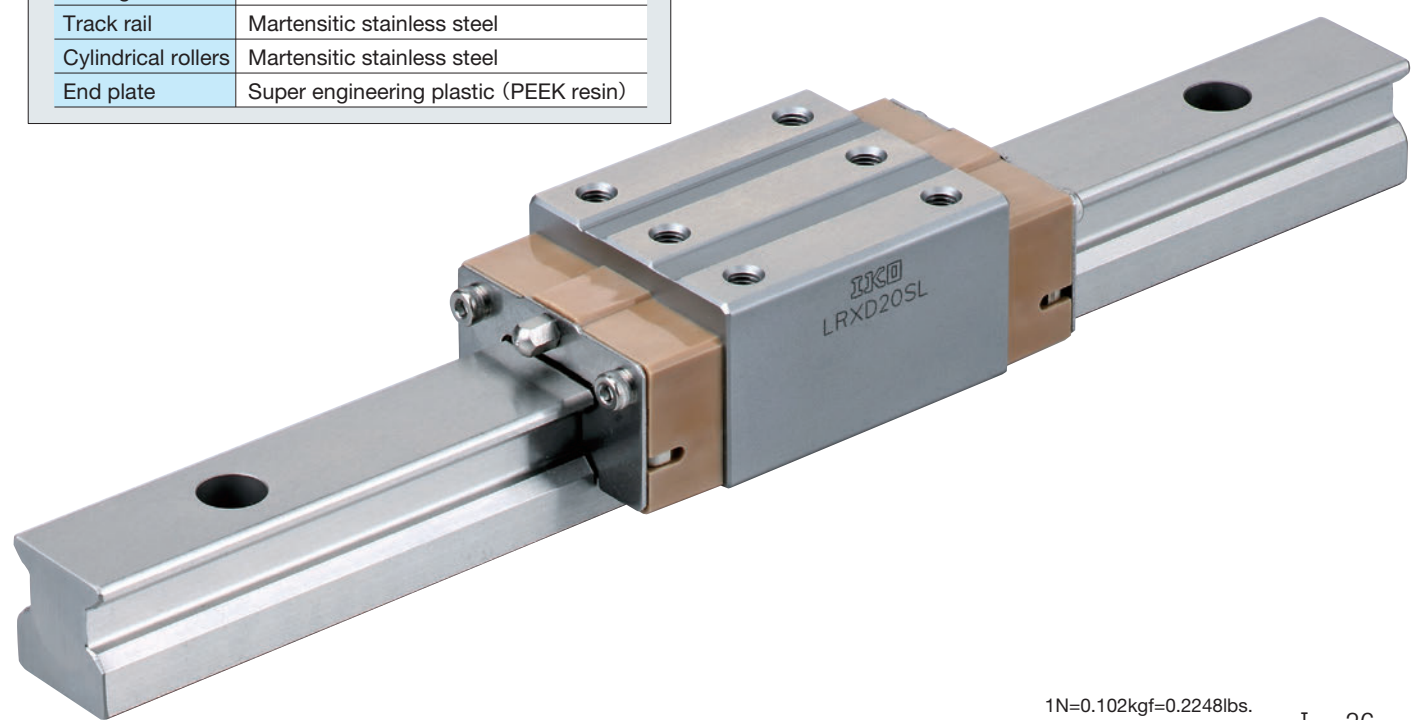

Hybrid C-Lube Linear Way ML

While maintenance free performance of C-Lube Linear Way ML is maintained, the silicon nitride ceramics ball improves high-speed performance and reduces noise level. Ceramics has more resistance to deformation and more rigidity than bearing steel and stainless steel.

ML.../HB

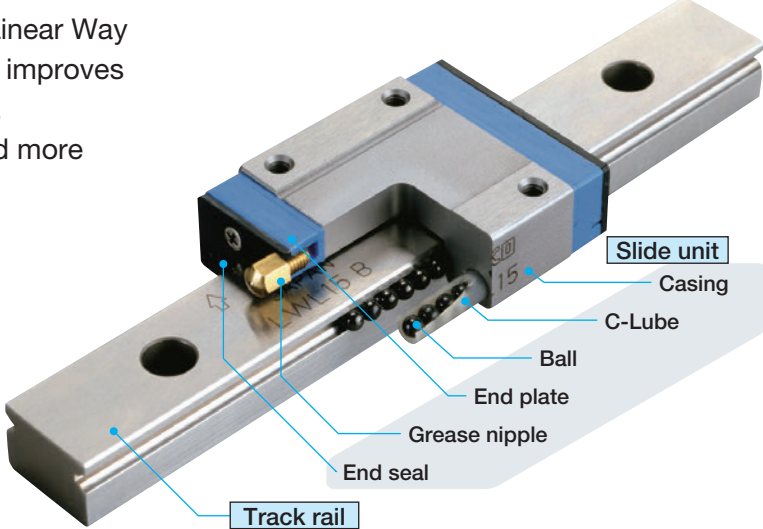

Standard specification	
Casing	Martensitic stainless steel
Track rail	Martensitic stainless steel
Ball	Silicon nitride ceramics
C-Lube	Capillary lubricating element (Porous resin)

Features

- 1 Superior high-speed performance ... More than three times durability
- 2 Noise reduction Noise reduction by about 4.5 dB
- 3 High rigidity Displacement volume reduced by about 10%
- 4 Superior abrasion resistance ... Preload reduction volume is about one fourth

※ All of the above based on comparison with our C-Lube Linear Way ML



Maintenance free
Achieved long term maintenance free

Eco-friendly
Minimized lubrication oil consumption


Compact
Integral lubrication parts

Smooth
Excellent sliding characteristic

Performance

More than three times durability


High-speed performance

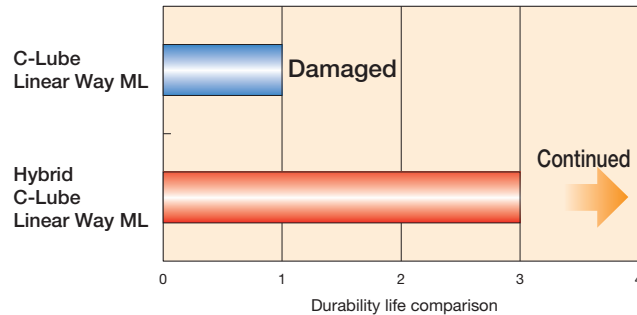

Test conditions Model : ML12 Velocity: 300 m/min Acceleration: 40 G

Noise reduction by about 4.5 dB


Low decibel

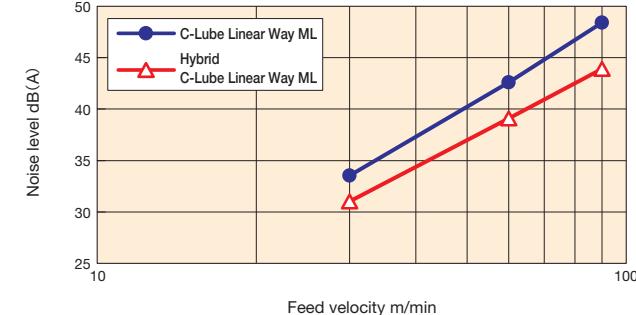

Test conditions Model : ML12 Measurement velocity: 30, 60, 90 m/min

Small deformation of rolling elements and excellent rigidity


High rigidity

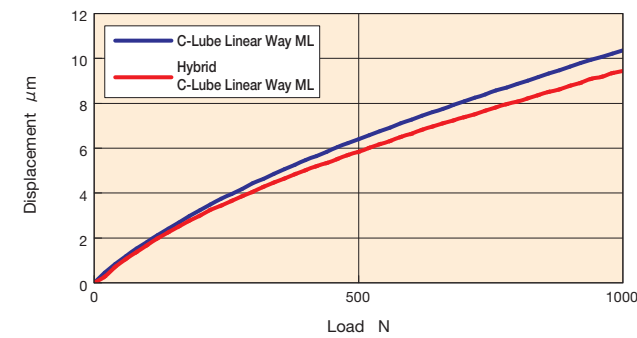

Test conditions Model : ML12 Preload: Standard Preload Load direction: Downward

Low preload reduction volume and accuracy maintained after operation

Abrasion resistance

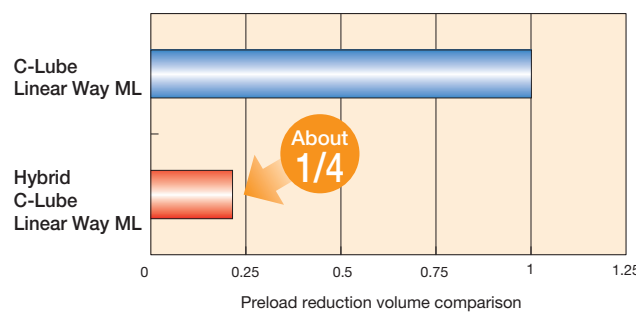


Test conditions Model : ML12 Velocity: 300 m/min Acceleration: 40 G Traveling distance: 13,000 km

Basic performance of C-Lube Linear Way


Achieved long term maintenance free

Maintenance free

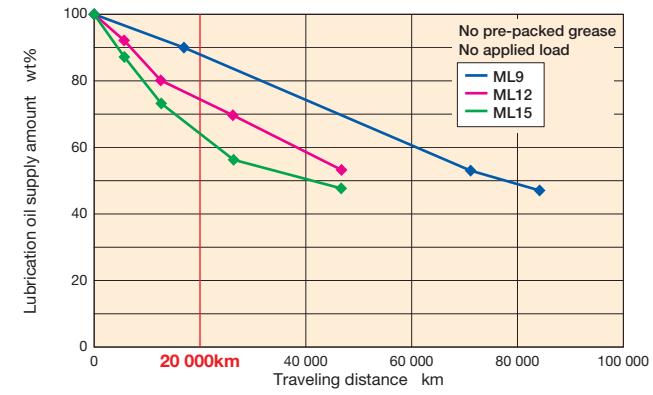

Achieved light and smooth sliding

Sliding characteristic

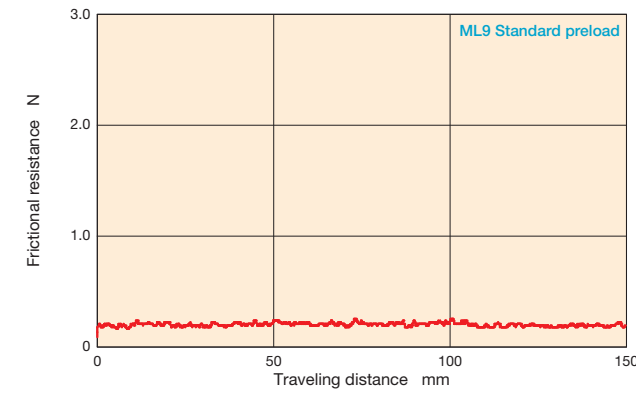


1N=0.102kgf=0.2248lbs.
1mm=0.03937inch

Non-magnetic Hard Alloy Linear Way L

Non-magnetic hard alloy Linear Way L is a linear motion rolling guide that realizes relative magnetic permeability lower than 1.001 and relative magnetic permeability lower than one tenth of that of conventional non-magnetic stainless steel products. Further, durability more than three times as higher as that of non-magnetic stainless steel products is realized.

Non-magnetic hard alloy Linear Way L is a non-magnetic linear motion rolling guide optimal to avoid effects of magnetic force in magnetic field environment.

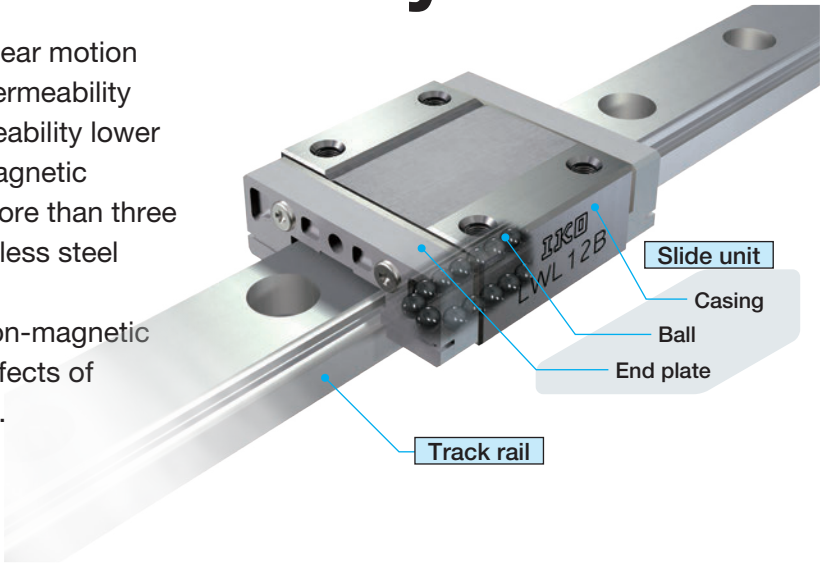

Features

Relative magnetic permeability 1.001 or less

Relative magnetic permeability lower than one tenth of that of non-magnetic stainless steel products

More than three times durability

More than three times durability with hardness 1.5 times as much as that of non-magnetic stainless steel products

High corrosion resistance

Optimal for use in clean environment thanks to corrosion-resistant alloy

Easy handling


Casing and track rail have excellent ductility and coefficient of linear expansion similar to general metals as they are made of metal

Main component materials		Non-magnetic hard alloy characteristics		Applicable products	
Casing	Non-magnetic hard alloy	Relative magnetic permeability	1.001 or less	Series	Linear Way L
Track rail	Non-magnetic hard alloy	Hardness (HV)	610~700	Main model	LWL5...B to LWL15...B
Ball	Silicon nitride ceramics	Linear expansion coefficient (×10 ⁻⁶ /°C)	11.5(30~200°C)	Remark: Ball retaining bands are not incorporated. For detailed specifications or manufacturing information, please contact IKO .	
End plate	Non-magnetic alloy steel	Specific gravity (g/cm ³)	7.7		
		Main ingredients	Ni, Cr		

Non-magnetic stainless Linear Roller Way Super X

The non-magnetic stainless Linear Roller Way Super X is the world's first non-magnetic stainless steel endless motion roller type linear motion rolling guide to attain relative magnetic permeability of 1.01 or less. This is accomplished through the dedicated development of silicon nitride ceramic cylindrical rollers and non-magnetic stainless steel casings and track rails.

Despite being non-magnetic material it still maintains the superior vibration characteristics, excellent running accuracy, and friction characteristics provided by the Linear Roller Way Super X. This allows for accurate and rapid positioning in environments affected by minimal magnetism.

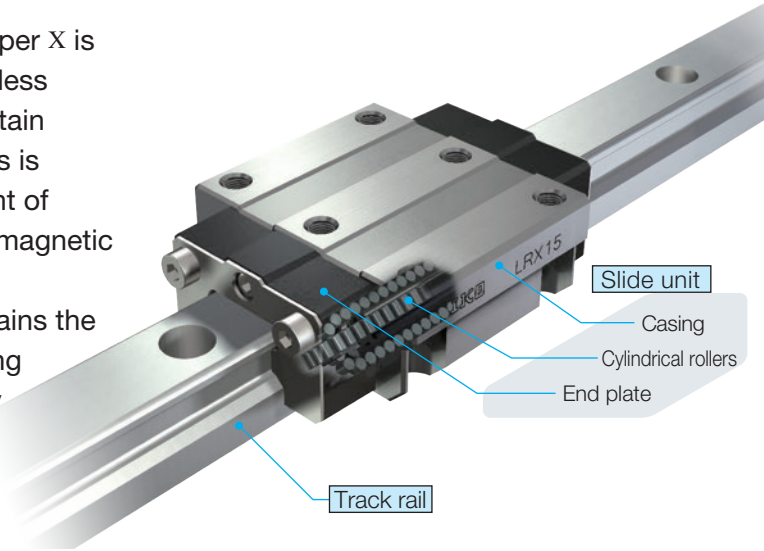

Features

World first for roller types

The first non-magnetic specifications ever realized in the world for endless motion roller type linear motion rolling guides

Relative magnetic permeability 1.01 or less

Allows for accurate and rapid positioning in environments affected by minimal magnetism

High corrosion resistance

Optimal for use in clean environment thanks to non-magnetic stainless steel

High running accuracy


The superb vibration characteristics of roller type linear motion rolling guides allow superior running accuracy

Main component materials		Non-magnetic stainless steel characteristics		Applicable products	
Casing	Non-magnetic stainless steel	Relative magnetic permeability	1.01 or less	Series	Linear Roller Way Super X
Track rail	Non-magnetic stainless steel	Hardness (HV)	380~450	Main model	LRX15, LRXD15, LRXS15
Cylindrical roller	Silicon nitride ceramics	Linear expansion coefficient (×10 ⁻⁶ /°C)	19.0(20~400°C)	For detailed specifications or manufacturing information, please contact IKO .	
End plate	Engineering plastic	Specific gravity (g/cm ³)	7.9		
		Main ingredients	Fe, Mn, Cr		

Stainless Linear Way and Linear Roller Way

A variety of stainless steel series

IKO Linear Way and Linear Roller Way lineup include products with stainless steel made parts instead of steel parts. As stainless steel is resistant to rust relative to high carbon steel made products, they are optimal for use in applications where oil and rust prevention oil are not preferred. It is also suitable for use in cleanroom environment room, so use IKO clean grease that inhibits dust-generation amount together.

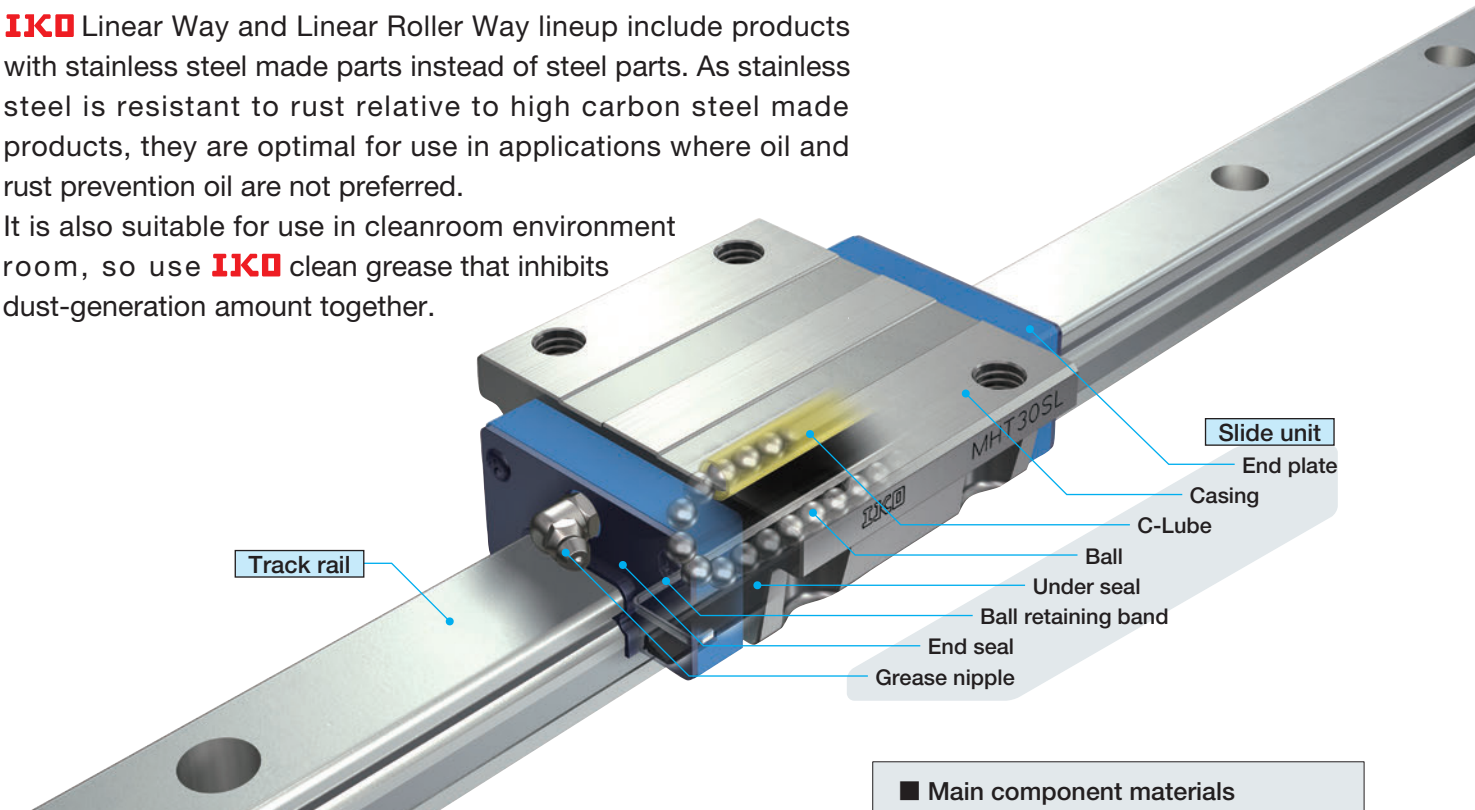

Series name

Linear Way

Ball Type Miniature Series

C-Lube Linear Way ML
C-Lube Linear Way MLV
Linear Way L
Micro Linear Way L

Ball Type Compact Series

C-Lube Linear Way ME
Linear Way E

Ball Type High Rigidity Series

C-Lube Linear Way MH
Linear Way H

Ball Type Wide Type Series

Linear Way F

Ball Type U-Shaped Track Rail Series

C-Lube Linear Way MUL

Main component materials

Casing	Martensitic stainless steel
Track rail	Martensitic stainless steel
Ball	Martensitic stainless steel
Ball retaining band	Stainless steel
End plate	Engineering plastic
End seal	Stainless steel + Synthetic rubber
Grease nipple	Brass

Linear Roller Way

Roller Type

C-Lube Linear Roller Way Super MX
Linear Roller Way Super X

Combination with special specification corresponds to use in special environment!

Rust prevention

Black chrome surface treatment /L

Black chrome surface treatment on the track rail and slide unit improves rust prevention capacity.

Fluorine black chrome surface treatment /LF

Coating of fluorinated resin is applied over the black chrome surface treatment to prevent foreign substances from sticking and improve the rust prevention capacity.




Black chrome surface treatment

Features

- 1 Thin film
- 2 Uniform film
- 3 Strong adhesion
- 4 Excellent rust prevention capacity
- 5 Low temperature processing to prevent distortion
- 6 No peeling and no effects on life and cleanroom environment

Corrosion resistance comparison based on humidity cabinet test

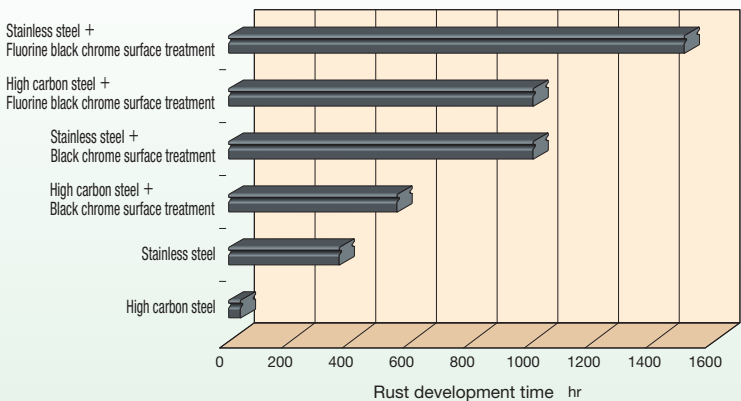

Test conditions Temperature 50°C, Relative humidity 95%RH


Special specification for special environment

IKO Linear Way and Linear Roller Way lineup include following special specifications to correspond to various special environments.

Dust protection

C-Wiper /RC

Mounted to the outside of end seal, it may be used for long time even under environment where metal chips are spattering. End seal, inner seal (/UR) and scraper (/Z) may be equipped as standard when you specify special specification /RC with C-Wiper. If you need inner seal only, specify /UR.

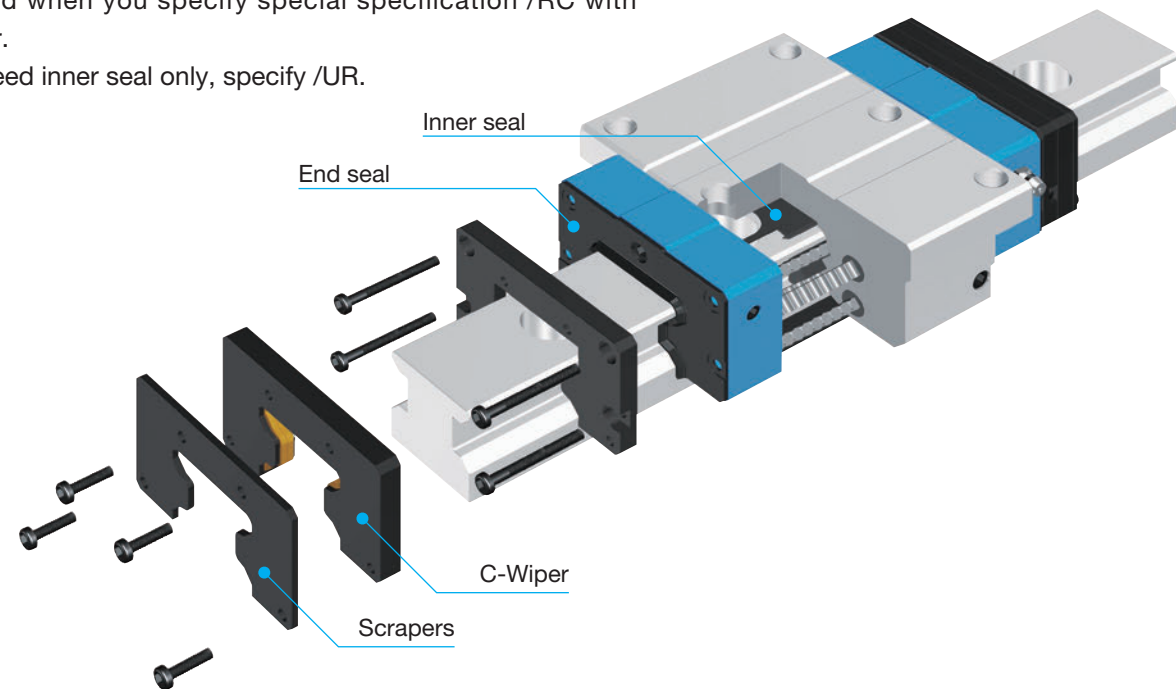

Applicable C-Wiper size

Model	Length of slide unit	Model code	Size								
			12	15	20	25	30	35	45	55	65
Flange type mounting from top / bottom	Short	MXC	—	—	○ ⁽¹⁾	○	○	○	○	○	○
	Standard	MX	—	—	○ ⁽¹⁾	○	○	○	○	○	○
	Long	MXG	—	—	○ ⁽¹⁾	○	○	○	○	○	○
	Extra long	MXL	—	—	○ ⁽¹⁾	○	○	○	○	○	○
Block type mounting from top	Short	MXDC	—	—	○	○	○	○	○	○	○
	Standard	MXD	—	—	○	○	○	○	○	○	○
	Long	MXDG	—	—	○	○	○	○	○	○	○
	Extra long	MXDL	—	—	○	○	○	○	○	○	○
Compact block type mounting from top	Short	MXSC	—	—	○	○	○	—	—	—	—
	Standard	MXS	—	—	○	○	○	○	○	○	—
	Long	MXSG	—	—	○	○	○	○	○	○	—
	Extra long	MXSL	—	—	○	○	○	—	—	—	—
Low profile flange type mounting from top	Standard	MXN	—	—	—	—	○	○	○	○	—
	Long	MXNG	—	—	—	—	○	○	○	○	—
	Extra long	MXNL	—	—	—	—	○	○	○	○	—
Low profile block type mounting from top	Standard	MXNS	—	—	—	—	○	○	○	○	—
	Long	MXNSG	—	—	—	—	○	○	○	○	—
	Extra long	MXNSL	—	—	—	—	○	○	○	○	—



Note ⁽¹⁾ Also applicable to models mounting from bottom (MXHC20, MXH20, MXHG20, MXHL20).

Dust protection


Durability test result backing excellent dust protection effect of [C-Wiper]!

Durability test in environment with foreign substances

Test conditions	
Test portion	MX35 T3 preload / caps for rail mounting holes and C-Wiper included
Maximum velocity	18 m/min
Stroke length	500 mm
Foreign substances	Fine metal chips Particle diameter lower than 125 μm Hardness HRC40 ~ 50 Application dose 1 g/hr (total dose: 1 kg)




After operation of 1,000 km



Only few foreign substances may get into the slide unit.





After operation of 1,000 km

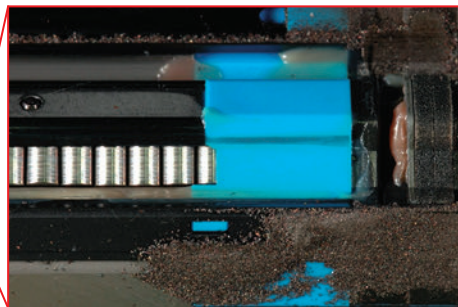

Only few foreign substances get into the way!

Durability test in coolant mist environment


Test conditions	
Test portion	MX35 T3 preload / caps for rail mounting holes and C-Wiper included
Maximum velocity	115.2 m/min
Stroke length	300 mm
Coolant	Soluble type Dilute strength 20 times Spray amount 5 cc/hr

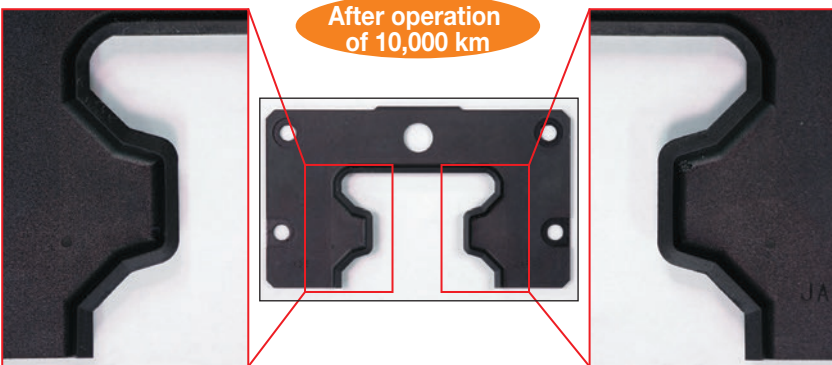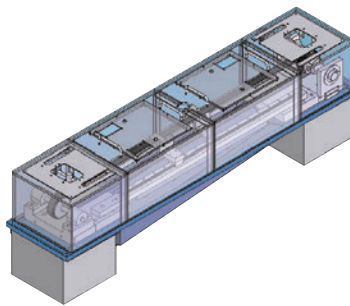

After operation of 10,000 km

End seal is not damaged.

Wear condition of end seal lip tip

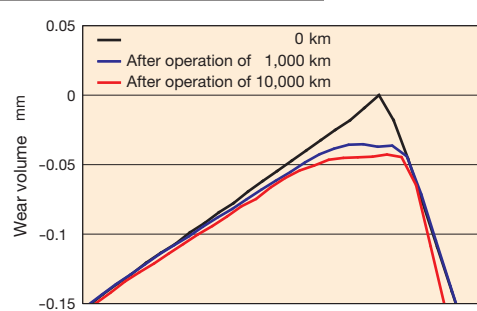


Wear on the end seal is negligible!

Special specification for special environment

Dust protection


Rail cover sheet

Rail cover sheet that consists of steel plate and adhesive tape and fastened to the dedicated track rail with groove on the track rail prevents foreign substances from entering into the slide unit.

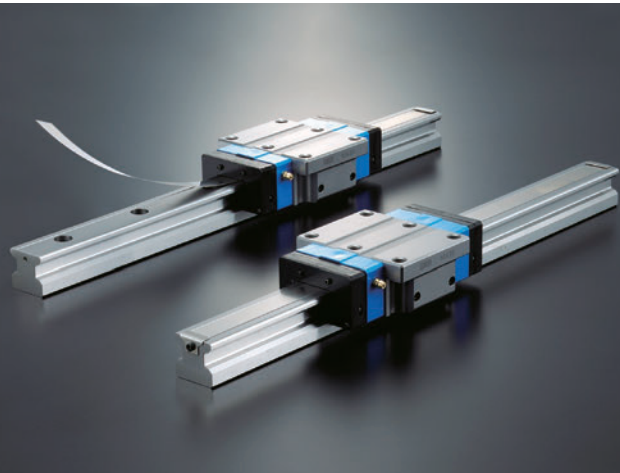


Caps for rail mounting holes /F

Caps for rail mounting holes close the track rail mounting holes to prevent foreign substances from entering into the slide unit.
Contact **IKO** for aluminum alloy caps for rail mounting holes.

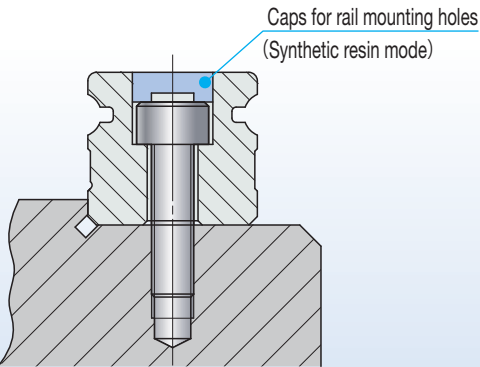


Double end seals /V

Double end seals improve the dust protection property further.

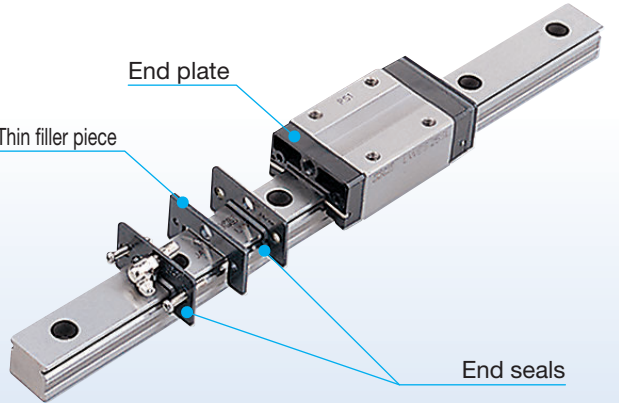

Scraper /Z

Mounted to the outside of end seal, it may remove large foreign substances adhering to the track rail.

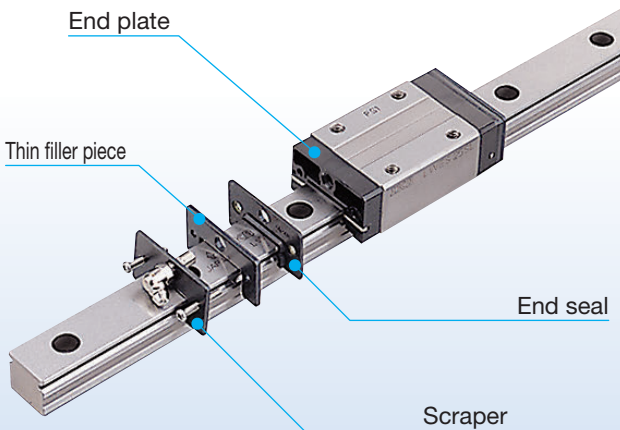


Rail cover plate /PS

Rail cover plate totally covers the upper surface of the track rail to prevent foreign substances from entering into the track rail.




Track rail mounting from bottom

This is the specification that track rail is fixed from the mounting surface side. As there are no mounting holes on the track rail upper surface, adherence with the seal is superior and better dust protection effect is achieved.

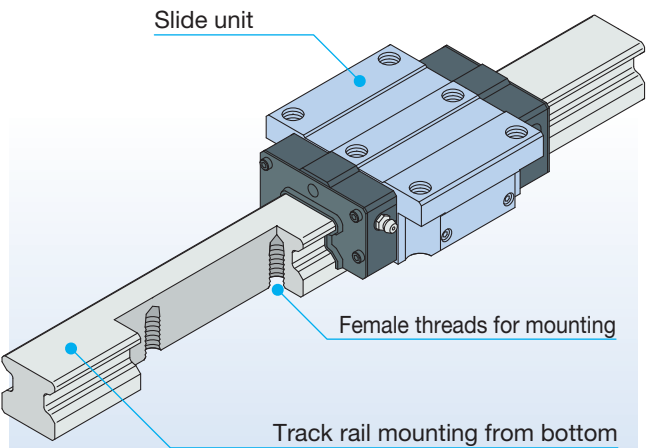


Female threads for bellows /J

Female threads for bellows are prepared on the slide unit and track rail ends.

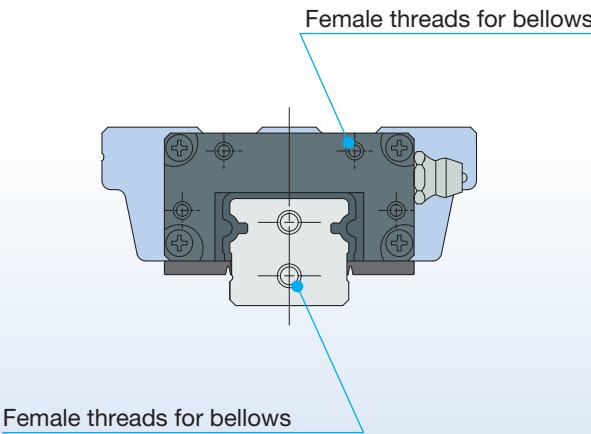

Specific bellows

Dust protection cover over the exposed part of the track rail.

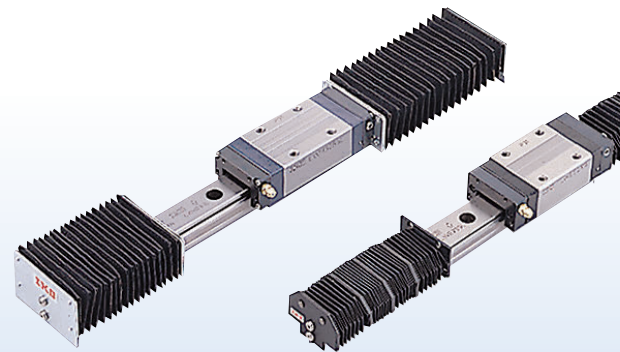


Special specification for special environment

Lubrication

With C-Lube plate /Q


Lubrication parts to substantially reduce the need for lubrication management, i.e. grease job.

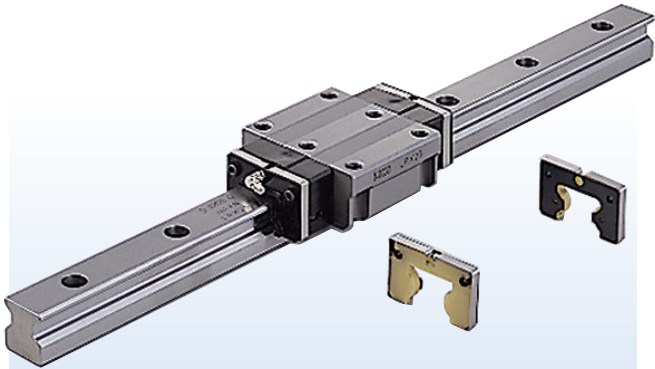

Low Dust-Generation Grease for Clean Environment CGL /YCL

For this grease, mixed soap is used as thickener and synthetic oil and low pour point mineral oil are mixed with base oil, so it has excellent low dust generating performance, rolling resistance, lubrication, and rust prevention property.

Bellows cartridge (80 g)
JG80 /CGL

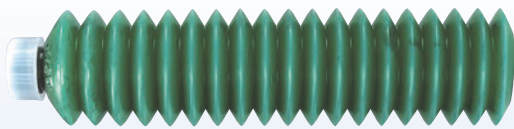


With miniature greaser (2.5 ml)
MG2.5 /CGL



Low Dust-Generation Grease for Clean Environment CG2 /YCG

For this grease, urea is used as thickener and synthetic oil is used as base oil, so it has excellent low dust generating performance, operating temperature range, lubrication property, rust prevention property and oxidation stability.

Bellows cartridge (80 g)
JG80 /CG2

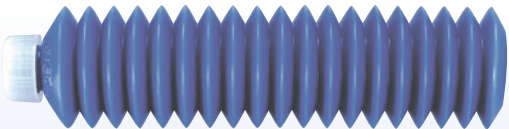

With miniature greaser (2.5 ml)
MG2.5 /CG2




MG10 /CG2 with 10 ml are also available.

Anti-Fretting Corrosion Grease AF2 /YAF

Grease with excellent fretting-proof corrosion property.

Bellows cartridge (80 g)
JG80 /AF2

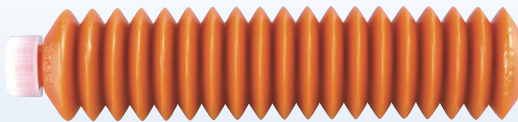

With miniature greaser (2.5 ml)
MG2.5 /AF2




Other special grease

If you need any special grease for vacuum or high temperature, ask for **IKO** your request.

Others


Stainless steel end plate /BS

End plate is changed to stainless steel.

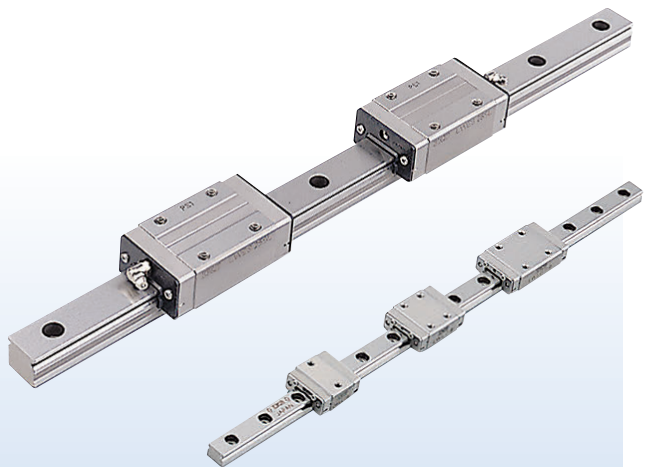


Special environment seal /RE

The end and under seals are replaced with end seals for special environment that can be used at high temperatures. When it is used in high temperature environment, stainless steel end plate (/BS) and high temperature grease should be combined.

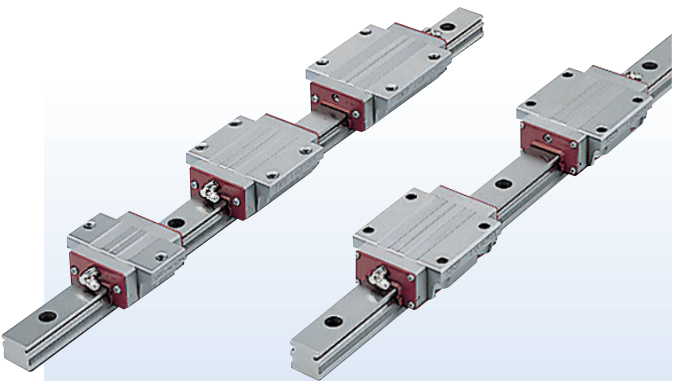

The photo shows a combination of special environment seal (/RE) and stainless steel end plate (/BS).

IKO can offer products for special environment!

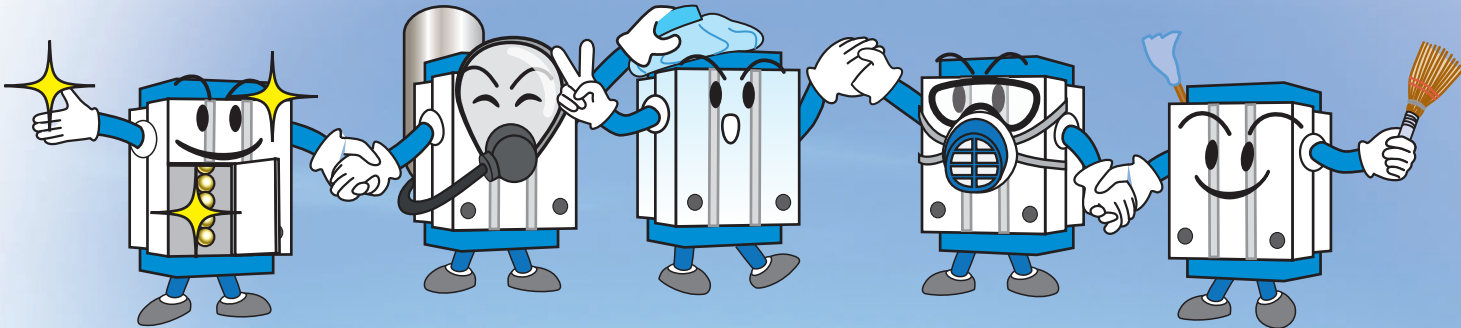

If needed, ask **IKO** for your request.